

# Lutz Drum Pump Sets



## PURE Lutz Pump Set for FDA / 3A applications, non Ex application

**Include:**

Electric or air driven motor, 8 ft. Food Grade Hose 1", non-conductive Tri-clamp connections, 39" / 47" / 55", high-head ETFE impeller, 2" PP drum adapter, SS Nozzle / EPDM seal, with swivel, Wall hanger



Type of motor:	B55-T	MD2xL Air motor
<b>Technical Data:</b>		
Motor:	120 V, 0.68 HP, TEFC	1.36 HP, 87 PSI, 53 CFM
Max. Viscosity:	1000 CPS	1,000 CPS*
Max. Capacity:	13.2 GPM	13.2 GPM
Max. spec. Gravity:	1.6	2.8
Immersion depth:	39"	39"
Order-No.	P206-411-1	P206-411-2
Immersion depth:	47"	47"
Order-No.	P206-412-1	P206-412-2
Immersion depth:	55"	55"
Order-No.	P206-413-1	P206-413-2




## PURE Lutz Pump Set for FDA / 3A applications, EX proof applications

**Include:**

Electric or air driven motor, 8 ft. Food Grade Hose 1", conductive, Tri-clamp conductive connections, 39" / 47" / 55", high-head ETFE impeller, 2" SS drum adapter, SS Nozzle / EPDM seal, with swivel, Wall hanger, Ground & Bonding wires



Type of motor:	ME I 6 (Ex)	MD2xL Air motor
<b>Technical Data:</b>		
Motor:	120 V, 0.68 HP, TEFC	1.36 HP, 87 PSI, 53 CFM
Max. Viscosity:	750 CPS	100,000 CPS*
Max. Capacity:	13.2 GPM	13.2 GPM
Max. spec. Gravity:	1.6	2.8
Immersion depth:	39"	39"
Order-No.	P206-511-1	P206-511-2
Immersion depth:	47"	47"
Order-No.	P206-512-1	P206-512-2
Immersion depth:	55"	55"
Order-No.	P206-513-1	P206-513-2

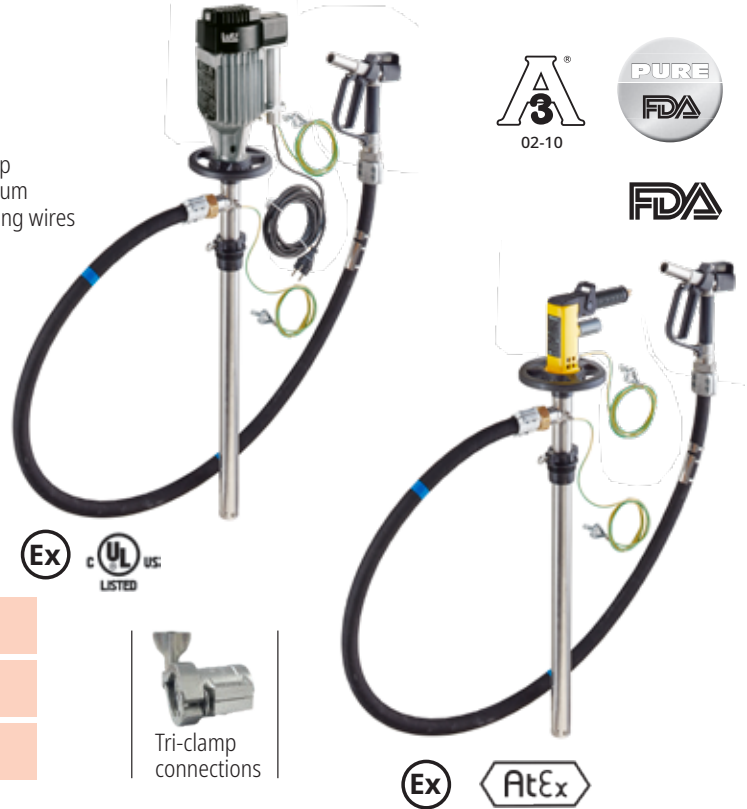

\*Max. 760 CPS is with hand nozzle

### Lutz Pumps, Inc.

1160 Beaver Run Road · Norcross, GA 30093-4898 · Phone: (770) 925-1222 or (800) 843-3901 · Fax: (770) 923-0334  
 E-Mail: info@lutzpumpsamerica.com · www.lutzpumpsamerica.com